



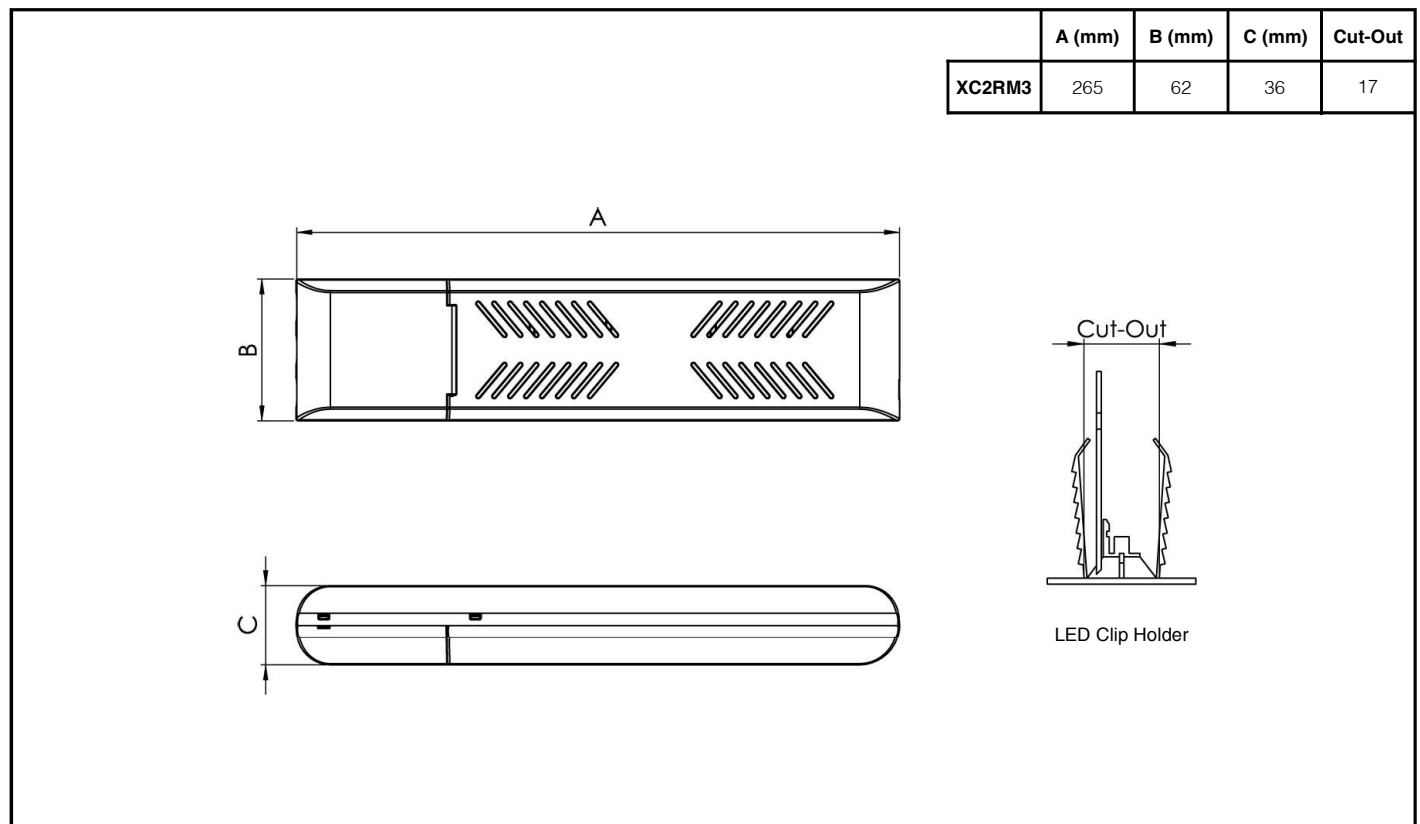
**Product Name: EM KIT**

## General information

- This luminaire must be installed in accordance with the latest edition of the IET Wiring Regulations and local Building Regulation by a qualified competent person.
- The mains power supply must be turned off before inspection, installation or removal of the luminaire, ensuring that the supply is locked off to prevent inadvertently switching the supply on.
- It is the installer's responsibility to ensure that the installation is suitable for the total load of the luminaire(s). The supply cable fuses/circuit breakers must be correctly rated for the electrical load and taking into account for any transient inrush currents that may occur.
- It is the installer's responsibility to ensure that the environmental operating and storage conditions are complied with and that any fire risks are considered.
- Do not perform insulation strength or insulation resistance tests on the installation with the luminaire(s) connected, this can damage the luminaires and give erroneous readings.
- Do not loop-in supply cables at the luminaire supply terminals unless there is provision for 2-way connection at the terminals.
- The light source contained in this luminaire must only be replaced by TamLite Lighting or an appointed service agent.
- Emergency lighting luminaires must be installed and maintained in accordance with the emergency lighting standard BS 5266-1.
- To ensure that the product warranty remains valid, the luminaire must be installed and maintained in accordance with these installation instructions and the product must not be modified in any way.

-  Luminaires marked with this symbol must not be covered with thermally insulating material.
-  This symbol on covers over light sources indicates dangerous live parts do not operate the luminaire with this cover removed.

## Dimensions



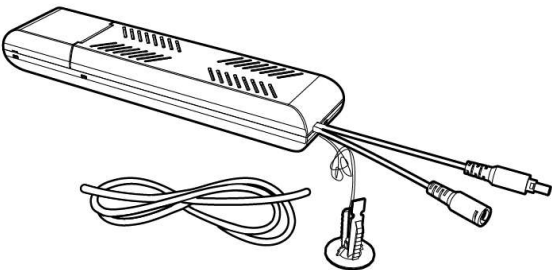
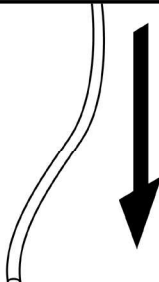
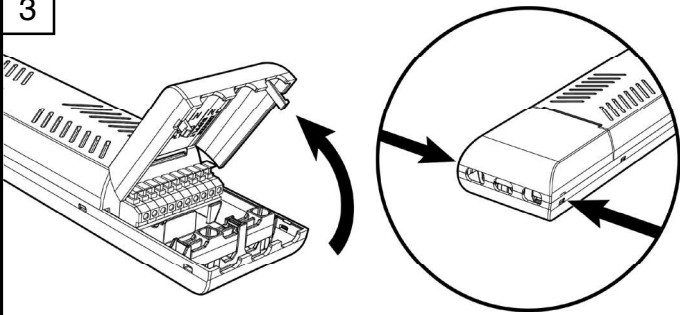
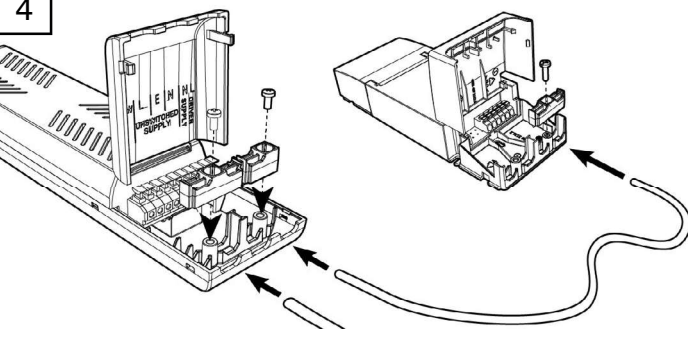




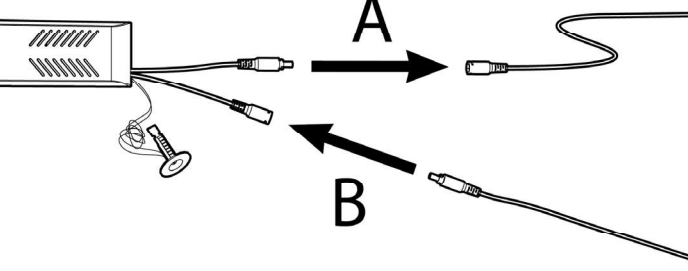


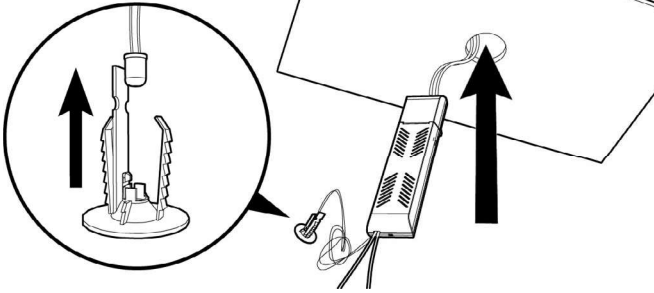
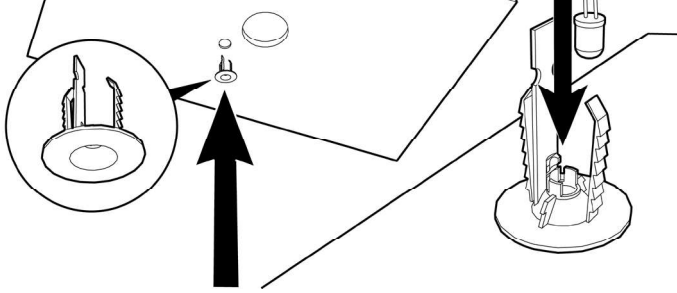
**Page 1 of 2**

TamLite Technical  
Stafford Park 12,  
Telford, Shropshire,  
TF3 3BJ

+44(0)1952 292441  
technical@tamlite.co.uk  
Document No: V1



**Product Name: EM KIT**

|   |   |  |   |
|---|---|--|---|
| <p><b>1</b></p>  <p>Remove the product from its packaging.</p>   | <p><b>2</b></p>  <p>Bring electrical supply cable to the EM KIT unit.</p>  |  |   |
| <p><b>3</b></p>  <p>Release the catches to open the terminal housing.</p>  | <p><b>4</b></p>  <p>Secure cables with screw in strain relief, use the 2-core cable to connect to driver.</p>                                  |  |   |
| <p><b>5</b></p> <table border="0"> <tr> <td> <p>L<sub>SW</sub>   L   E   N   NL</p> <p>UNSWITCHED SUPPLY   DRIVER SUPPLY</p>  <p>Switched Live<br/>Permanent Live<br/>Earth<br/>Neutral</p> </td> <td> <p>DRIVER</p> <p>N   L</p>  <p>Neutral<br/>Live</p> </td> </tr> </table> <p>Terminate the supply cable to the Terminal block as shown.</p> | <p>L<sub>SW</sub>   L   E   N   NL</p> <p>UNSWITCHED SUPPLY   DRIVER SUPPLY</p>  <p>Switched Live<br/>Permanent Live<br/>Earth<br/>Neutral</p> | <p>DRIVER</p> <p>N   L</p>  <p>Neutral<br/>Live</p> | <p><b>6</b></p>  <p>Connect the Luminaire driver via "A" and the luminaire via "B".</p> |
| <p>L<sub>SW</sub>   L   E   N   NL</p> <p>UNSWITCHED SUPPLY   DRIVER SUPPLY</p>  <p>Switched Live<br/>Permanent Live<br/>Earth<br/>Neutral</p>   | <p>DRIVER</p> <p>N   L</p>  <p>Neutral<br/>Live</p>  |  |   |
| <p><b>7</b></p>  <p>Remove the indicator LED trim and feed the EM KIT through the mounting surface.</p>  | <p><b>8</b></p>  <p>Install the indicator trim adjacent to the luminaire position and re-attach the LED.</p>                                  |  |   |

**Page 2 of 2**

Tamlite Technical  
Stafford Park 12,  
Telford, Shropshire,  
TF3 3BJ

+44(0)1952 292441  
technical@tamlite.co.uk  
Document No: V1

