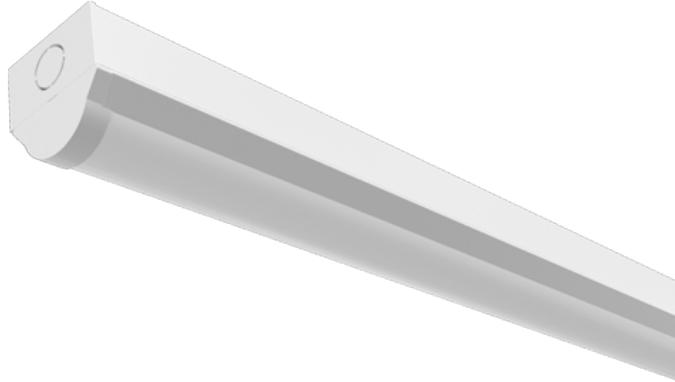


**Order Code: XCBT2X1**

X1 Batten - 600mm - CCT [3000K/4000K/6000K] + Wattage Selectable

**Features**

- Ideal for replacement of linear fluorescent fixtures
- Suitable for general domestic and commercial use
- CCT [3000K/4000K/6000K] adjustable via 3-way selector switch
- Wattage [11W/13W/15W/18W] adjustable via 2-way dip switch

**Construction**

- Slimline steel body finished in white (RAL 9016)
- High quality opal diffuser to reduce glare
- Integral emergency option available
- Loop in/out mains connector
- Conduit and BESA fixing points for end or rear cable entry

**Installation Notes**

Centrally-mounted loop-in, loop-out push fit terminal block

**Technical Data****General**

Luminaire Wattage (W)	11W/13W/15W/18W
Weight (kg)	0.68
Operating Temperature (ta °C)	45

**Light Output**

Lumens (lm)	1300 to 2300
Efficacy (lm/W)	132

**LED**

CRI	85
Macadam Ellipses	5

**Driver**

Driver Current (mA)	200 , 250 , 300 , 350
Forward Voltage (V)	25 to 57

**Emergency**

Emergency Lumen Operating	264
Emergency Wattage (W)	2

**Electrical**

Rated Input Current (A)	0.09
Power Factor (pf)	0.83 to 0.92
Input Voltage Range (VAC)	220 to 240
Inrush Current Peak (A)	175
Surge Protection (kV)	L-N 1kV, LN-PG 2kV
Conductor Size (mm)	0.5 to 2.5
Terminal Type	3 pole piano key

**Order Code: XCBT2X1**

X1 Batten - 600mm - CCT [3000K/4000K/6000K] + Wattage Selectable

## Dimensions

A (mm)	600
B (mm)	55
C (mm)	58

## Line Drawing

