


### Order Code: XCBT4X1P

X1 Batten - 1200mm - CCT [3000K/4000K/6000K] + Wattage Selectable - Batten fit PIR

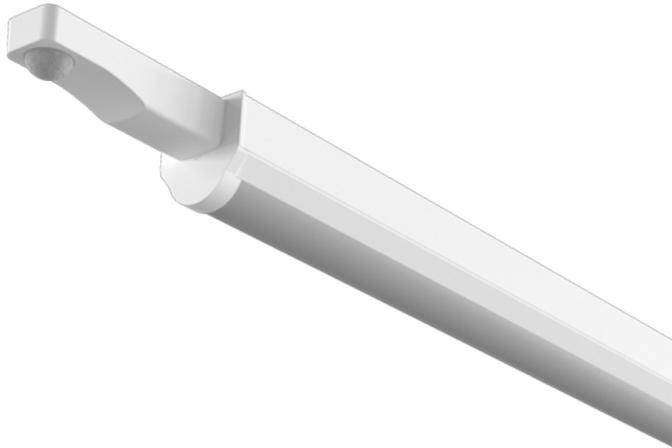

#### Features

- Ideal for replacement of linear fluorescent fixtures
- Suitable for general domestic and commercial use
- CCT [3000K/4000K/6000K] adjustable via 3-way selector switch

#### Construction

- Slimline steel body finished in white (RAL 9016)
- High quality opal diffuser to reduce glare
- Loop in/out mains connector
- Conduit and BESA fixing points for end or rear cable entry

#### Installation Notes

Centrally-mounted loop-in, loop-out push fit terminal block



### Technical Data

#### General

Luminaire Wattage (W)	20W/25W/30W/35W
Weight (kg)	1.31
Operating Temperature (ta °C)	45

#### Light Output

Lumens (lm)	2750 to 4900
Efficacy (lm/W)	146

#### LED

CRI	85
Macadam Ellipses	5

#### Driver

Driver Current (mA)	200 , 250 , 300 , 350
Forward Voltage (V)	40 to 115

#### Emergency

Emergency Lumen Operating	293
Emergency Wattage (W)	2

#### Electrical

Rated Input Current (A)	0.16
Power Factor (pf)	0.91 to 0.96
Input Voltage Range (VAC)	220 to 240
Inrush Current Peak (A)	190
Surge Protection (kV)	L-N 1KV, LN-PG 2KV
Conductor Size (mm)	0.5 to 2.5
Terminal Type	3 pole piano key

**Order Code: XCBT4X1P**

X1 Batten - 1200mm - CCT [3000K/4000K/6000K] + Wattage Selectable - Batten fit PIR

Dimensions

A (mm)	1321
B (mm)	55
C (mm)	58
Fix	610

Line Drawing

