


Order Code: XCBHX1M3
[3000K/4000K/6000K] + Wattage Selectable - Emergency

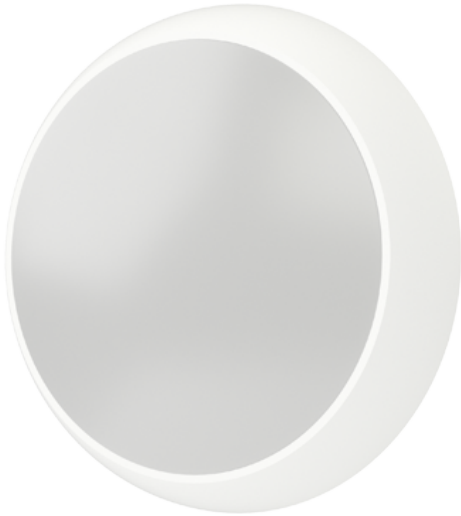

Features

- Suitable for most domestic and commercial applications
- CCT [3000K/4000K/6000K] adjustable via 3-way selector switch
- Wattage [8W,12W,16W] adjustable via 3-way selector switch
- Twist On/Off diffuser with screwlock suitable for public spaces
- Hinged gear tray for quick and easy installation

Construction

- Manufactured from durable thermoplastic materials
- Modular emergency and sensor pack for quick and easy conversion

Installation Notes

Conduit side entry points for surface mount cable entry
Loop in/out push-fit terminal block for quick installation

Technical Data

General		Electrical	
Luminaire Wattage (W)	8 to 16	Rated Input Current (A)	0.04 to 0.07
Weight (kg)	1.37	Power Factor (pf)	0.82 to 0.92
Operating Temperature (ta °C)	5° to 25°	Input Voltage Range (VAC)	220 to 240
Light Output		Inrush Current Peak (A)	2.08
Lumens (lm)	1000 - 1900	Surge Protection (kV)	1KV
Efficacy (lm/W)	130	Conductor Size (mm)	0.5 to 2.5
LED		Terminal Type	4 pole piano key
CRI	80		
Macadam Elipses	1.5 to 9.1		
Driver			
Driver Current (mA)	140 to 215 to 280		
Forward Voltage (V)	47.6 to 50		
Emergency			
Emergency Lumen Operating	135		
Emergency Wattage (W)	2		

**Order Code:** XCBHX1M3  
[3000K/4000K/6000K] + Wattage Selectable - Emergency

Dimensions

C (mm)	85
Dia. (mm)	320

Line Drawing

