


### Order Code: XCBHX1MS

X1 Bulkhead - CCT [3000K/4000K/6000K] + Wattage Selectable - Microwave sensor

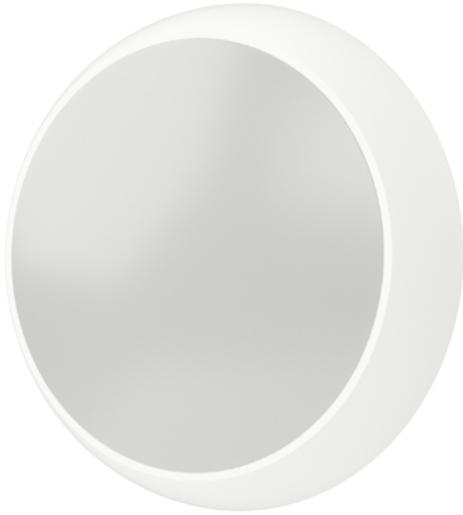

#### Features

- Suitable for most domestic and commercial applications
- CCT adjustable via 3-way selector switch [3000K/4000K/6000K]
- Wattage [8W, 12W, 16W] adjustable via 3-way selector switch
- Twist On/Off diffuser with screwlock suitable for public spaces
- Hinged gear tray for quick and easy installation

#### Construction

- Manufactured from durable thermoplastic materials
- Modular [emergency](#) and [microwave sensor](#)'s available for quick and easy conversion of a standard fitting
- For additional control, please use [X1 Bulkhead Remote](#) [Sold Separately]
- Pre-assembled emergency and sensor luminaires available

#### Installation Notes

Conduit side entry points for surface mount cable entry  
Loop in/out push-fit terminal block for quick installation

#### Technical Data

General		Electrical	
Luminaire Wattage (W)	8W/12W/16W	Rated Input Current (A)	0.04 to 0.07
Weight (kg)	0.87	Power Factor (pf)	0.82 to 0.92
Operating Temperature (ta °C)	5° to 25°	Input Voltage Range (VAC)	220 to 240
		Inrush Current Peak (A)	18.9
		Surge Protection (kV)	1KV
		Conductor Size (mm)	0.5 to 2.5
		Terminal Type	4 pole piano key
Light Output			
Lumens (lm)	1000 to 1900		
Efficacy (lm/W)	130		
LED			
CCT (K)	3000K/4000K/6000K		
CRI	80		
Macadam Elipses	1.5 to 9.1		
Driver			
Driver Current (mA)	140 to 215 to 280		
Forward Voltage (V)	47.6 to 50		

**Order Code: XCBHX1MS**

X1 Bulkhead - CCT [3000K/4000K/6000K] + Wattage Selectable - Microwave sensor

Dimensions

C (mm)	85
-----	
Dia. (mm)	320
-----	

Line Drawing

