# xcite LED Lighting
## Data Sheet

**Order Code:** XCEMBANM3ST

XCITE EM BULKHEAD ST XCEMBA 1W - 6500K - Fixed output - non-maintained Emergency Self-test



### Features

- Suitable for open areas and escape routes
- 20mm conduit side and rear cable entries for wall or ceiling fix
- Semi recessed bezel available
- Reduced maintenance and high performance
- Supplied with LiFePO4 battery

### Construction

- Polycarbonate body and diffuser
- Maintained or non-maintained available
- Supplied with self adhesive universal legend
- Supplied as standard with daylight [6500K] LED
- Integral auto self-test for reduced maintenance, includes a disable function

6500K | 50,000 HOURS | 3YRS WARRANTY | IP65 | IK06 | M3 | LiFePO4

## Technical Data

### General

| | |
|---|---|
| Luminaire Wattage (W) | 1 |
| Weight (kg) | 0.55 |
| Operating Temperature (ta °C) | 5° to 25° |

### LED

| | |
|---|---|
| CRI | 70 |
| Macadam Elipses | 2.1 |

### Driver

| | |
|---|---|
| Driver Current (mA) | 360 |
| Forward Voltage (V) | 3.4 |

### Emergency

| | |
|---|---|
| Emergency Lumen Operating | 190 |
| Emergency Wattage (W) | 1 |

### Electrical

| | |
|---|---|
| Rated Input Current (A) | 0.03 |
| Power Factor (pf) | 0.17 |
| Input Voltage Range (VAC) | 220 to 240 |
| Conductor Size (mm) | 1.5 |
| Terminal Type | 3 pole piano key |

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

CE UKCA

# xcite LED Lighting
## Data Sheet

**Order Code:** XCEMBANM3ST

XCITE EM BULKHEAD ST XCEMBA 1W - 6500K - Fixed output - non-maintained Emergency Self-test

### Dimensions

| | |
|---|---|
| Length (mm) | 352 |
| Width (mm) | 110 |
| Depth (mm) | 65 |

### Line Drawing

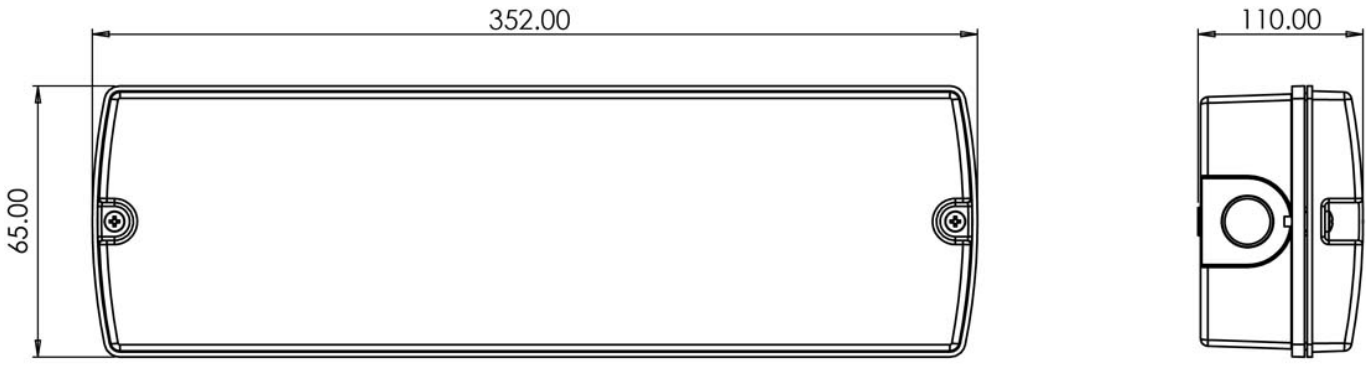


Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk