


**Order Code: XCLS547CTBDM3**

XCITE LINEAR SUSPENDED CCT XCLS - Black - 47W - Dimmable - Emergency - 3000K/4000K/5000K - Opal diffuser

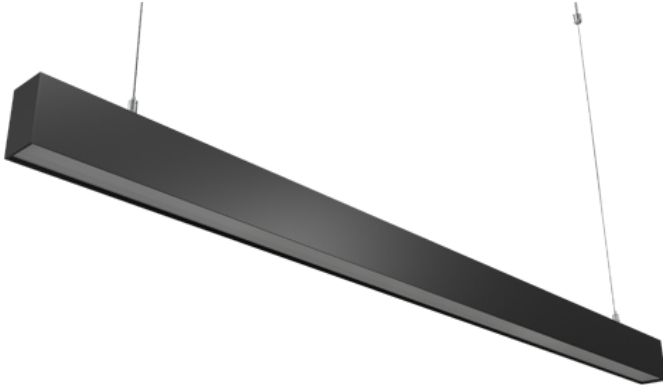

**Features**

- Suitable for offices and schools
- Independently switchable up/down modes with adjustable CCT [3000K/4000K/5000K]
- DALI and push switch dimmable as standard
- Complete with adjustable 1.5m wire suspension and 1.8m power feed
- Up to 123 lumens per watt efficacy

**Construction**

- Opal polycarbonate diffuser
- Emergency option available
- Extruded aluminium body finished in black or white
- Fitted polycarbonate end caps



**Technical Data**

**General**

Luminaire Wattage (W)	47
Weight (kg)	6.16
Operating Temperature (ta °C)	5 to 25

**Light Output**

Lumens (lm)	5800
Efficacy (lm/W)	123

**LED**

CCT (K)	3000K/4000K/5000K
CRI	90
Macadam Elipses	<5

**Driver**

Driver Current (mA)	1050
Forward Voltage (V)	41

**Emergency**

Emergency Lumen Operating	514
Emergency Wattage (W)	4

**Electrical**

Rated Input Current (A)	0.21
Power Factor (pf)	0.98
Input Voltage Range (VAC)	220 to 240
Surge Protection (kV)	1
Conductor Size (mm)	0.5 to 2.5
Terminal Type	SLK series 4 to pole grip to wire + 2 to pole grip to wire

**Order Code: XCLS547CTBDM3**

XCITE LINEAR SUSPENDED CCT XCLS - Black - 47W - Dimmable - Emergency - 3000K/4000K/5000K - Opal diffuser

Dimensions

A (mm)	1500
B (mm)	45
C (mm)	70
Fix	1275

Line Drawing

