


Order Code: XCMWX1M3

X1 MIDI WALL XCMW - 3000K-6000K + Wattage Selectable - Fixed output - Emergency

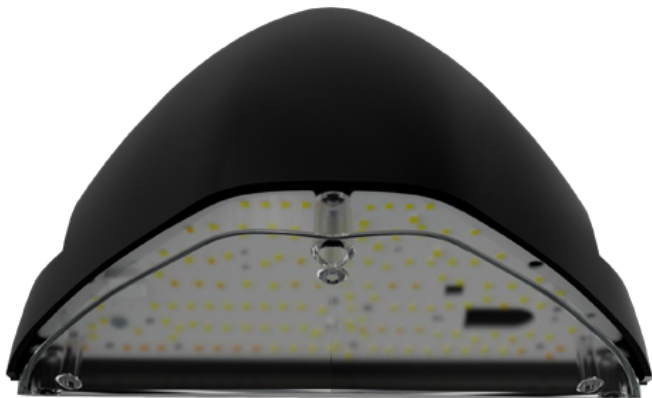

Features

- **Switchable CCT**
Enables the required colour temperature to be selected to suit the desired lighting environment.
- **Selectable Wattage**
Enables the required light output to be selected to suit the application
- **Up to 146 lm/W**
Delivers high performance illumination while helping to reduce energy consumption.

Construction

- **IP65**
Protects against dust and water ingress for reliable performance in demanding environments
- **IK10**
Provides excellent resistance to impact, helping to maintain long term performance
- **Cast Aluminium Construction**
Provides a robust, durable housing for long term reliability
- **Side & Rear Cable Entry**
Provides flexible cable entry options to suit a wide range of installation requirements.

Technical Data

General		Electrical	
Luminaire Wattage (W)	7 / 9 / 11 / 13	Rated Input Current (A)	0.04 / 0.04 / 0.05 / 0.06
Weight (kg)	1.43	Power Factor (pf)	0.9 to 0.96
Operating Temperature (ta °C)	5° to 25°	Input Voltage Range (VAC)	220 to 240
Light Output		Inrush Current Peak (A)	10A
Lumens (lm)	1050/1327/1564/1813	Surge Protection (kV)	1kV
Efficacy (lm/W)	146	Conductor Size (mm)	0.5 to 2.5
LED		Terminal Type	4 pole piano key
CRI	82 to 86		
Macadam Ellipses	1.5 to 7.5		
Driver			
Driver Current (mA)	200 / 250 / 300 / 350		
Forward Voltage (V)	29.5 to 31.3Vdc		
Emergency			
Emergency Lumen Operating	151		
Emergency Wattage (W)	1		

Order Code: XCMWX1M3
X1 MIDI WALL XCMW - 3000K-6000K + Wattage Selectable - Fixed output - Emergency

Dimensions

A (mm)	137
B (mm)	260
B (mm)	214

Line Drawing

