


Order Code: XCSL5X1M3MS

Surface Linear X1 - 1500mm - 3000K-6000K + Wattage Switchable - Prismatic diffuser - Emergency - Microwave sensor

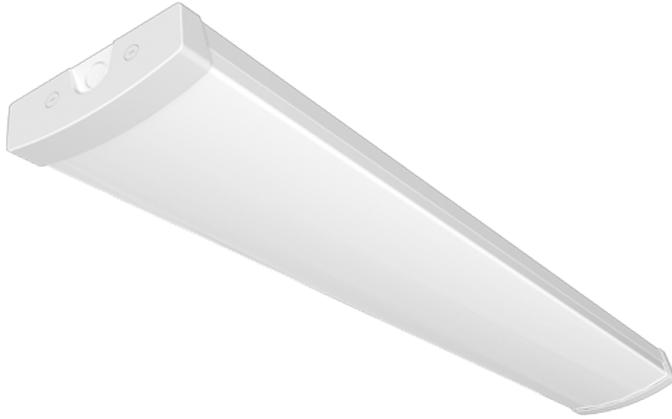

Features

- Suitable for schools, offices, corridors and general areas
- CCT adjustable via 3-way selector switch [3000K/4000K/6000K]
- Wattage adjustable via selector switch [28W/34W/41W/47W]
- Up to 119 lumens per watt efficacy
- Surface mounted

Construction

- Low glare prismatic, polycarbonate, Tp(a) rated diffuser
- Steel body in white finish
- Rear BESA fixings or side cable entry



Technical Data

General

Luminaire Wattage (W)	28W/34W/41W/47W
Weight (kg)	3.28
Operating Temperature (ta °C)	5° to 25°

Light Output

Lumens (lm)	3300/4100/4900/5600
Efficacy (lm/W)	119

LED

CCT (K)	3000K/4000K/6000K
CRI	83 to 87
Macadam Elipses	2.8 to 8.8

Driver

Driver Current (mA)	200 to 350
Forward Voltage (V)	127 to 133

Emergency

Emergency Lumen Operating	295
Emergency Wattage (W)	3

Electrical

Rated Input Current (A)	0.13 to 0.21
Power Factor (pf)	0.92 to 0.96
Input Voltage Range (VAC)	220 to 240
Inrush Current Peak (A)	43.6
Surge Protection (kV)	L-N 1KV, LN-PG 2KV
Conductor Size (mm)	0.5 to 2.5
Terminal Type	4 pole piano key

Order Code: XCSL5X1M3MS

Surface Linear X1 - 1500mm - 3000K-6000K + Wattage Switchable - Prismatic diffuser - Emergency - Microwave sensor

Dimensions

A (mm)	1525
B (mm)	155
C (mm)	55

Line Drawing

